



MINISTRY OF AVIATION

AERONAUTICAL RESEARCH COUNCIL  
REPORTS AND MEMORANDA

# The Buckling of Plates Tapered in Planform

By G. G. POPE, M.Sc.(Eng.)

LONDON: HER MAJESTY'S STATIONERY OFFICE

1963

TEN SHILLINGS NET

# The Buckling of Plates Tapered in Planform

By G. G. POPE, M.Sc.(Eng.)

COMMUNICATED BY THE DEPUTY CONTROLLER AIRCRAFT (RESEARCH AND DEVELOPMENT),  
MINISTRY OF AVIATION

---

*Reports and Memoranda No. 3324\**

*April, 1962*

---

## *Summary.*

An analysis is given of the buckling of a plate of constant thickness tapered symmetrically in planform and subjected to uniform compressive loading on the parallel ends. Two cases are considered.

(1) Different uniform loads applied normal to the ends, equilibrium being maintained by shear flows along the sides.

(2) Equal uniform stresses applied normal to the ends, with displacement of the sides prevented normal to the direction of taper.

Opposite pairs of edges are either simply-supported or clamped.

---

## 1. *Introduction.*

In a recent report<sup>1</sup> the author gives an analysis of the buckling of rectangular plates tapered in thickness and loaded in the direction of taper. In this report a similar method is used to analyse the buckling of a plate of constant thickness tapered symmetrically in planform and subjected to uniform compressive loading on the parallel ends. Two cases are considered.

(1) Different uniform normal loads applied to the ends, equilibrium being maintained by shear flows along the sides.

(2) Equal uniform stresses applied normal to the ends with displacement of the sides prevented normal to the direction of taper.

Results are given graphically for plates with opposite pairs of edges either simply-supported or clamped.

The analysis is based on the assumption that the buckled shape normal to the direction of taper differs little from the buckled shape across a rectangular plate of constant thickness under uniform end load with the same boundary conditions along the sides, but simply-supported at the ends. Assuming this transverse buckled form, a linear differential equation with variable coefficients is obtained for the longitudinal deflected shape using a form of the Rayleigh-Ritz method which has previously been applied extensively by Kantorovich<sup>2</sup>. A series solution is derived to this equation.

---

\* Replaces R.A.E. Report No. Structures 274—A.R.C. 23,973.

Klein<sup>3,4</sup> has analysed the buckling of a simply-supported isosceles plate tapered in thickness and in planform by expressing the deflected shape along the axis of symmetry as a Fourier series, and evaluating the coefficients by a collocation method. The results obtained here, which themselves represent an upper limit on the buckling load, are often significantly lower than those calculated by Klein.

## 2. Assumptions.

(1) The plate is perfectly elastic.

(2) The transverse buckled shape is the same as that across a rectangular plate of constant thickness under uniform end load with the same boundary conditions along the sides, but simply-supported at the ends.

It is difficult to determine the range of validity of the second assumption, but this analysis should give a good estimate of the buckling load when the sides make an angle of less than, say, 15° with the axis of symmetry.

## 3. General Analysis.

An analysis is given here of the buckling of a plate tapered symmetrically in planform and subjected to different uniform normal loads  $N_{x1}$  and  $N_{x2}$  along the parallel ends  $x = 0$  and  $x = a$ . The axes and notation used are shown in Fig. 1. The deflection  $w$  of the plate can be represented approximately in the form

$$W = \frac{w}{a} = f(X) \Phi(\theta)$$

where

$$X = 1 + \rho \frac{x}{a}, \quad Y = \frac{y}{b_1},$$

$$\rho = \frac{b_2}{b_1} - 1, \quad \theta = \frac{Y}{X}$$

and  $b_1$  and  $b_2$  are the widths of the plate at  $x = 0$  and  $x = a$  respectively. The function  $\Phi(\theta)$  represents an assumed deflected shape normal to the  $x$  axis and the function  $f(X)$  can be found by an energy method.

The most general system of middle-surface forces considered here can be expressed as

$$\left. \begin{aligned} \bar{\sigma}_x &= \alpha_0 + \alpha_1 X, \\ \bar{\sigma}_y &= \beta_0 + \beta_1 X, \\ \bar{\tau}_{xy} &= \gamma Y \end{aligned} \right\} \quad (1)$$

where

$$\bar{\sigma}_x = \frac{\sigma_x}{E} \left( \frac{b_1}{t} \right)^2 = \frac{N_x b_1^2}{12(1-\nu^2)D} \text{ etc.,}$$

and the coefficients  $\alpha_i$ ,  $\beta_i$  and  $\gamma$  are constants.

It is shown in Appendix I that, for this system of middle-surface forces, the function  $f(X)$  satisfies the following differential equation.

$$p_4 X^4 f'''' + p_3 X^3 f''' + (p_2 + q_2 X^2 + r_2 X^3) X^2 f'' + (p_1 + q_1 X^2 + r_1 X^3) X f' + (p_0 + q_0 X^2 + r_0 X^3) f = 0 \quad (2)$$

where

$$\left. \begin{aligned} f' &= \frac{df}{dx} \text{ etc. and} \\ p_0 &= \rho^4(l_4 + 12l_3 + 36l_2 + 24l_1) + 2\rho^2\mu^2(s_2 + 6s_1 + 6s_0) + \mu^4 m_0, \\ p_1 &= -4\rho^4(l_3 + 6l_2 + 6l_1) - 4\rho^2\mu^2(s_1 + 2s_0), \\ p_2 &= 6\rho^4(l_2 + 2l_1) + 2\rho^2\mu^2 s_0, \\ p_3 &= -4\rho^4 l_1, \\ p_4 &= \rho^4 l_0, \\ q_0 &= -12(1-\nu^2)\{\rho^2\alpha_0(l_2 + 2l_1) + \mu^2\beta_0 s_0\}, \\ q_1 &= 24(1-\nu^2)\rho^2\alpha_0 l_1, \\ q_2 &= -12(1-\nu^2)\rho^2\alpha_0 l_0, \\ r_0 &= -12(1-\nu^2)\{\rho^2\alpha_1(l_2 + 2l_1) + \mu^2\beta_1 s_0 - 2\gamma\rho\mu(l_1 + l_2)\}, \\ r_1 &= 24(1-\nu^2)\rho l_1(\rho\alpha_1 - \mu\gamma), \\ r_2 &= -12(1-\nu^2)\rho^2\alpha_1 l_0 \end{aligned} \right\} \quad (3)$$

where

$$\left. \begin{aligned} \mu &= \frac{a}{b_1}, \\ l_i &= \int_{-1/2}^{+1/2} \theta^i \Phi \frac{d^i \Phi}{d\theta^i} d\theta, \quad l_0 = \int_{-1/2}^{+1/2} \Phi^2 d\theta, \\ s_i &= \int_{-1/2}^{+1/2} \theta^i \Phi \frac{d^{i+2} \Phi}{d\theta^{i+2}} d\theta, \quad m_0 = \int_{-1/2}^{+1/2} \Phi \frac{d^4 \Phi}{d\theta^4} d\theta. \end{aligned} \right\} \quad (4)$$

Equation (2) can be solved by expanding  $f$  as a power series. To improve the convergence of the series at the ends of the plate at  $X = 1$  and  $X = 1 + \rho$ , the expansion is performed about  $X = 1 + 0.5\rho$  by substituting

$$f = Z^c \sum_{r=0}^{\infty} a_r Z^r$$

where

$$Z = X - \lambda$$

and

$$\lambda = 1 + 0.5\rho.$$

The index  $c$  is found by equating the coefficient of  $Z^{c-4}$  in equation (2) to zero, giving the indicial equation

$$c(c-1)(c-2)(c-3) = 0.$$

Thus, as equation (2) is linear, the required complete solution is

$$f = \sum_{r=0}^{\infty} a_n Z^n \quad (5)$$

where the coefficients  $a_0, a_1, a_2$  and  $a_3$  are arbitrary. In general a coefficient  $a_{n+4}$  is obtained by equating the coefficient of  $Z^n$  in equation (2) to zero, giving

$$\begin{aligned} & [r_0 + (n-3)r_1 + (n-3)(n-4)r_2]a_{n-3} + \\ & + [q_0 + 3\lambda r_0 + (n-2)(q_1 + 4\lambda r_1) + (n-2)(n-3)(q_2 + 5\lambda r_2)]a_{n-2} + \\ & + [2q_0 + 3\lambda r_0 + 3(n-1)(q_1 + 2\lambda r_1) + (n-1)(n-2)(4q_2 + 10\lambda r_2)]\lambda a_{n-1} + \\ & + [p_0 + \lambda^2 q_0 + \lambda^3 r_0 + n(p_1 + 3\lambda^2 q_1 + 4\lambda^3 r_1) + n(n-1)(p_2 + 6\lambda^2 q_2 + 10\lambda^3 r_2) + \\ & + n(n-1)(n-2)p_3 + n(n-1)(n-2)(n-3)p_4]a_n + (n+1)[p_1 + \lambda^2 q_1 + \lambda^3 r_1 + \\ & + n(2p_2 + 4\lambda^2 q_2 + 5\lambda^3 r_2) + 3n(n-1)p_3 + 4n(n-1)(n-2)p_4]\lambda a_{n+1} + \\ & + (n+2)(n+1)[p_2 + \lambda^2 q_2 + \lambda^3 r_2 + 3np_3 + 6n(n-1)p_4]\lambda^2 a_{n+2} + \\ & + (n+3)(n+2)(n+1)[p_3 + 4np_4]\lambda^3 a_{n+3} + (n+4)(n+3)(n+2)(n+1)\lambda^4 a_{n+4} = 0. \end{aligned} \quad (6)$$

Coefficients with negative suffices which occur in equation (6) when  $n$  is less than 3 are zero by definition.

If the stress coefficients  $\bar{\sigma}_{y1}$  and  $\bar{\tau}_{xy1}$  are assumed to be proportional to  $\bar{\sigma}_{x1}$ , the latter can be used as the buckling coefficient. This is evaluated using a digital computer. A value of  $\bar{\sigma}_{x1}$  is first assumed which is known to be numerically less than the correct solution, the coefficients  $a_n$  of the series are then calculated in terms of the arbitrary constants  $a_0, a_1, a_2$  and  $a_3$  using equation (6). Four linear simultaneous equations are obtained for these constants from the boundary conditions along the ends. The buckling condition is satisfied only if the determinant of the coefficients of these equations is zero. This determinant is evaluated for the assumed value of  $\bar{\sigma}_{x1}$ , which is then adjusted until the determinant changes sign. Subsequent approximations to  $\bar{\sigma}_{x1}$  are made by interpolating and re-evaluating the determinant.

#### 4. Middle-Surface Forces.

The most general system of middle-surface forces considered here is made up of a linear variation of  $N_x$  along the plate with a consistent  $N_{xy}$  distribution. In this section expressions are derived for  $N_y$  under the prescribed conditions on the sides of the plate.

$N_x, N_y$  and  $N_{xy}$  are related by the middle-surface force function

$$\Psi = N_{x1} \frac{y^2}{2} + (N_{x2} - N_{x1}) \frac{xy^2}{2a} + g(x)$$

so that

$$\left. \begin{aligned} N_x &= N_{x1} + (N_{x2} - N_{x1}) \frac{x}{a} \\ &= N_{x1} \left(1 + \frac{x}{a}\right) - \frac{N_{x2}}{a} + (N_{x2} - N_{x1}) \frac{x}{a}, \\ N_y &= g''(x), \\ N_{xy} &= - (N_{x2} - N_{x1}) \frac{y}{a} \\ &= - (N_{x2} - N_{x1}) \frac{Y}{\mu}. \end{aligned} \right\} \quad (7)$$

If the sides make an angle  $\eta$  with the  $x$  axis as shown in Fig. 1, the normal and shear forces  $N_y$  and  $N_{x'y'}$  along them are given by

$$N_y = N_x \sin^2 \eta + N_y \cos^2 \eta + N_{xy} \sin 2\eta \quad (8)$$

$$N_{x'y'} = N_{xy} \cos 2\eta - \frac{1}{2}(N_y - N_x) \sin 2\eta.$$

Two kinds of loading are considered here:

(1) No load normal to the sides.

$N_y$  is obtained in terms of  $N_{x1}$  and  $N_{x2}$  by substituting equations (7) in equation (8) and putting  $N_{y'} = 0$ . Expressing  $\tan \eta$  in terms of  $\rho$  and  $\mu$ , this gives

$$N_y = -\frac{\rho^2}{4\mu^2} \left\{ N_{x1} \left( 1 + \frac{1}{\rho} \right) - \frac{N_{x2}}{\rho} \right\} - \frac{3\rho X}{4\mu^2} (N_{x2} - N_{x1}).$$

Thus the loading can be expressed in the notation of equations (1) as

$$\begin{aligned} \alpha_0 &= \bar{\sigma}_{x1} \mu^2 \left( 1 - \frac{\Delta}{\rho} \right), & \alpha_1 &= \bar{\sigma}_{x1} \frac{\mu^2 \Delta}{\rho}, \\ \beta_0 &= -\bar{\sigma}_{x1} \frac{\rho^2}{4} \left( 1 - \frac{\Delta}{\rho} \right), & \beta_1 &= -\frac{3\bar{\sigma}_{x1}}{4} \rho \Delta, \\ \gamma &= -\bar{\sigma}_{x1} \mu \Delta \end{aligned}$$

where

$$\Delta = \frac{N_{x2}}{N_{x1}} - 1.$$

(2) Constant longitudinal stress and no displacement of the sides normal to the direction of taper.

Here

$$\begin{aligned} N_{x1} &= N_{x2}, & \alpha_0 &= \bar{\sigma}_{x1} \mu^2, \\ N_y &= \nu N_x, & \beta_0 &= \nu \bar{\sigma}_{x1} \mu^2, \\ N_{xy} &= 0, & \alpha_1 &= \beta_1 = \gamma = 0. \end{aligned}$$

## 5. Applications.

The preceding analysis has been computed for plates with opposite pairs of edges either simply-supported or clamped. Expressions are given in Sections 5.1 and 5.2 for the constants required in equation (2) under these conditions and a list of the results plotted is given in Section 5.3.

### 5.1. Plate Simply-Supported along Sides.

The assumed transverse buckled form, which is here given by

$$\Phi = \cos \pi \theta,$$

does not completely satisfy the condition of simple support along the sides of the plate. It is shown in Appendix II however that the total work done on the plate by the spurious moments introduced along the sides is zero. The analysis given in Appendix I thus remains valid.

The constants required in equation (2) are here

$$\begin{aligned}
 l_0 &= \frac{1}{2}, & m_0 &= \frac{\pi^4}{2}, \\
 l_1 &= -\frac{1}{4}, & s_0 &= -\frac{\pi^2}{2}, \\
 l_2 &= -\frac{1}{24}(\pi^2-6), & s_1 &= \frac{\pi^2}{4}, \\
 l_3 &= \frac{1}{16}(\pi^2-6), & s_2 &= \frac{\pi^2}{24}(\pi^2-6), \\
 l_4 &= \frac{1}{160}(\pi^4-20\pi^2+120),
 \end{aligned}$$

### 5.2. Plate clamped along sides.

The assumed transverse buckled form is here represented approximately by

$$\Phi = \cosh p\theta - q \cos p\theta$$

where  $p$  is the first positive root (4.73004) of the equation

$$\left. \begin{aligned}
 \sinh \frac{p}{2} \cos \frac{p}{2} + \cosh \frac{p}{2} \sin \frac{p}{2} &= 0 \\
 q &= \frac{\cosh \frac{p}{2}}{\cos \frac{p}{2}}.
 \end{aligned} \right\} \quad (9)$$

This deflected shape which satisfies completely the boundary conditions along the sides, gives values of the buckling load for rectangular plates less than 1% above the exact value.

The constants required in equation (2) are given by

$$\begin{aligned}
 l_0 &= \frac{1}{2}(q^2+1), \\
 l_1 &= -\frac{1}{4}(q^2+1), \\
 l_2 &= -\frac{p^2}{24}(q^2-1) + \frac{p}{4}(q^4-1)^{1/2} - \frac{1}{4}(q^2+1), \\
 l_3 &= \frac{3p^2}{16}(q^2-1) + \frac{3p}{4}(q^4-1)^{1/2} + \frac{15}{8}(q^2+1), \\
 l_4 &= \frac{p^4}{160}(q^2+1) - \frac{5p^2}{8}(q^2-1) + \frac{15p}{4}(q^4-1)^{1/2} - \frac{27}{4}(q^2+1), \\
 m_0 &= p^4 l_0, \\
 \frac{s_0}{p} &= -\frac{p}{2}(q^2-1) + (q^4-1)^{1/2}, \\
 \frac{s_1}{p} &= \frac{3p}{4}(q^2-1) - \frac{3}{2}(q^4-1)^{1/2}, \\
 \frac{s_2}{p} &= \frac{p^2}{24}(q^2+1) - \frac{5p}{4}(q^2-1) + \frac{5}{2}(q^4-1)^{1/2}.
 \end{aligned}$$

### 5.3. Results.

The variation of the buckling coefficient  $\bar{\sigma}_{x1}$  with  $a/b_1$  is plotted for a series of values of  $b_2/b_1$  and  $N_{x2}/N_{x1}$  in the figures listed below with various combinations of the boundary conditions. The corresponding curves for rectangular plates, which are also given in these figures, have been obtained where possible from R.Ae.S. data sheets; other cases have been calculated by a method similar to that given in this report.

(a) Buckling coefficient of plate with no normal load along sides.

End boundary conditions	Side boundary conditions	$\frac{N_{x2}}{N_{x1}}$	Fig.
simply-supported	simply-supported	0.8	2
”	”	1	3
”	”	1.2	4
clamped	”	0.8	5
”	”	1	6
”	”	1.2	7
simply-supported	clamped	0.8	8
”	”	1	9
”	”	1.2	10
clamped	”	0.8	11
”	”	1	12
”	”	1.2	13

(b) Buckling coefficient of plate with no displacement of the sides normal to the direction of taper.

End boundary conditions	Side boundary conditions	$\frac{N_{x2}}{N_{x1}}$	Fig.
simply-supported	simply-supported	1	14
clamped	”	1	15
simply-supported	clamped	1	16
clamped	”	1	17

Specimen buckled shapes for the above loadings are shown in Figs. 18 and 19.

NOTATION (*See Fig. 1*)

Suffices 1 and 2 on stress, middle-surface force and length symbols indicate values at  $x = 0$  and  $x = a$  respectively.

$a, b$	Length and width of plate
$t$	Plate thickness
$x, y$	Cartesian co-ordinates
$x', y'$	Local Cartesian co-ordinates on side
$w$	Deflection
$\rho$	$= \frac{b_2}{b_1} - 1$
$X, Y$	$= 1 + \rho \frac{x}{a}, \frac{y}{b_1}$
$\theta$	$= \frac{Y}{X}$
$W$	$= \frac{w}{a}$
$\mu$	$= \frac{a}{b_1}$
$\lambda$	$= 1 + 0.5\rho$
$\eta$	Angle made by sides with $x$ axis
$E$	Young's modulus
$\nu$	Poisson's ratio (taken as 0.3 in computations)
$D$	Flexural rigidity $= Et^3/12(1-\nu^2)$
$N_x, N_y, N_{xy}$	Middle-surface forces
$\sigma_x, \sigma_y, \tau_{xy}$	Middle-surface stresses
$\bar{\sigma}_x, \bar{\sigma}_y, \bar{\tau}_{xy}$	$= \frac{\sigma_x}{E} \left( \frac{b_1}{t} \right)^2$ etc.
$\Delta$	$= \frac{\bar{\sigma}_{x2}}{\bar{\sigma}_{x1}} - 1$
$\Psi$	Middle-surface force function such that $N_x = \frac{\partial^2 \Psi}{\partial y^2}$ etc.
$\Phi$	Assumed transverse deflected shape
$f$	Function of $X$

NOTATION—*continued*

$\nabla^2$	Laplacian differential operator
$\nabla^4$	Biharmonic differential operator
$p, q$	Defined by equations (9)
$\alpha_i, \beta_i, \gamma$	Coefficients defined by equations (1)
$l_i, m_i, s_i$	Coefficients defined by equations (4)
$p_i, q_i, r_i$	Coefficients defined by equations (3)
$a_i$	Coefficients defined by equations (5)
$T$	Work done by middle-surface forces
$U$	Strain energy
$M_x, M_y$	Moments referred to $x, y$ axes
$M_x'$	Moment about side
$T'$	Work done on one side of plate by moment distribution $M_x'$ .

---

REFERENCES

No.	Author(s)	Title, etc.
1	G. G. Pope .. .. .	The buckling of plates tapered in thickness. A.R.C. R. & M. 3309. October, 1961.
2	L. V. Kantorovich and V. I. Krylov	Approximate methods of higher analysis. Chapter 4. English translation of 3rd Russian edition by C. D. Benster. Noordhoff. 1958.
3	B. Klein .. .. .	Buckling of plates tapered in planform. <i>J. App. Mech.</i> (Trans. ASME). Vol. 78. June, 1956.
4	B. Klein .. .. .	The buckling of tapered plates in compression. <i>Aircraft Engineering</i> . December, 1956.
5	S. P. Timoshenko and S. Woinowsky-Krieger .. .. .	<i>Theory of plates and shells</i> . Chapters 4 and 10. 2nd edition, McGraw-Hill. 1959.

## APPENDIX I

### *Basic Analysis of the Buckling of an Isosceles Trapezoidal Plate of Constant Thickness*

In classical small-deflection theory<sup>5</sup>, the strain energy of bending of a plate is given by

$$U = \iint \frac{D}{2} \left\{ (\nabla^2 w)^2 - 2(1-\nu) \left[ \frac{\partial^2 w}{\partial x^2} \frac{\partial^2 w}{\partial y^2} - \left( \frac{\partial^2 w}{\partial x \partial y} \right)^2 \right] \right\} dx dy.$$

The increment of the strain energy due to an infinitesimal arbitrary variation  $\delta w$  of the deflection is thus

$$\delta U = \iint D \left\{ \nabla^2 w \nabla^2 (\delta w) - (1-\nu) \left[ \frac{\partial^2 w}{\partial x^2} \frac{\partial^2 \delta w}{\partial y^2} + \frac{\partial^2 \delta w}{\partial x^2} \frac{\partial^2 w}{\partial y^2} - 2 \frac{\partial^2 w}{\partial x \partial y} \frac{\partial^2 \delta w}{\partial x \partial y} \right] \right\} dx dy.$$

Provided the variation  $\delta w$  satisfies the boundary conditions of the plate and the flexural rigidity  $D$  is constant, this expression can be integrated by parts twice to give

$$\delta U = D \iint \delta w \nabla^4 w dx dy. \quad (10)$$

The work done on the plate by the middle-surface forces  $N_x, N_y$  and  $N_{xy}$  is given by

$$T = -\frac{1}{2} \iint \left\{ N_x \left( \frac{\partial w}{\partial x} \right)^2 + N_y \left( \frac{\partial w}{\partial y} \right)^2 + 2N_{xy} \frac{\partial w}{\partial x} \frac{\partial w}{\partial y} \right\} dx dy.$$

Thus the increment of the work done due to the variation  $\delta w$  is given by

$$\delta T = -\iint \left\{ N_x \frac{\partial w}{\partial x} \frac{\partial \delta w}{\partial x} + N_y \frac{\partial w}{\partial y} \frac{\partial \delta w}{\partial y} + N_{xy} \left( \frac{\partial w}{\partial x} \frac{\partial \delta w}{\partial y} + \frac{\partial w}{\partial y} \frac{\partial \delta w}{\partial x} \right) \right\} dx dy.$$

Provided both the deflection  $w$  and the variation  $\delta w$  are zero along the edges of the plate and the middle-surface forces are in equilibrium, the increment  $\delta T$  of the work done can be integrated by parts to give

$$\delta T = \iint \delta w \left( N_x \frac{\partial^2 w}{\partial x^2} + N_y \frac{\partial^2 w}{\partial y^2} + 2N_{xy} \frac{\partial^2 w}{\partial x \partial y} \right) dx dy. \quad (11)$$

Equating expressions (10) and (11), we obtain

$$\iint \delta w \left\{ \nabla^4 w - \frac{1}{D} \left( N_x \frac{\partial^2 w}{\partial x^2} + N_y \frac{\partial^2 w}{\partial y^2} + 2N_{xy} \frac{\partial^2 w}{\partial x \partial y} \right) \right\} dx dy = 0$$

which may be rewritten in the non-dimensional form

$$\iint \delta W \left\{ \rho^4 \frac{\partial^4 W}{\partial X^4} + 2\rho^2 \mu^2 \frac{\partial^4 W}{\partial X^2 \partial Y^2} + \mu^4 \frac{\partial^4 W}{\partial Y^4} - 12(1-\nu^2)\mu^2 \left( \bar{\sigma}_x \rho^2 \frac{\partial^2 W}{\partial X^2} + \bar{\sigma}_y \mu^2 \frac{\partial^2 W}{\partial Y^2} + 2\bar{\tau}_{xy} \rho \mu \frac{\partial^2 W}{\partial X \partial Y} \right) \right\} dX dY = 0 \quad (12)$$

where

$$W = \frac{w}{a} \quad X = 1 + \rho \frac{x}{a} \quad Y = \frac{y}{b_1},$$

$$\rho = \frac{b_2}{b_1} - 1, \quad \mu = \frac{a}{b_1},$$

$$\bar{\sigma}_x = \frac{a^2 N_x}{12(1-\nu^2)\mu^2 D} = \sigma_x \left( \frac{b_1}{t} \right)^2, \quad \bar{\sigma}_y = \sigma_y \left( \frac{b_1}{t} \right)^2 \text{ etc.}$$

and  $b_1$  and  $b_2$  are the widths of the plate at  $x = 0$  and  $x = a$  as shown in Fig. 1.

If  $W$  were the true deflected shape of the plate and the variation  $\delta W$  were completely arbitrary, this integral would yield the differential equation for the deformation of the plate. In the present analysis however  $W$  is represented approximately by the expression

$$W = f(X)\Phi(\theta)$$

where

$$\theta = \frac{Y}{X}$$

and  $\Phi$  is an assumed function. The ordinary differential equation for  $f$  is found by considering a restricted variation  $\delta W$  such that

$$\delta W = \Phi \delta f.$$

As the variation  $\delta f$  is arbitrary, the integration sign with respect to  $X$  can be removed from expression (12), leaving

$$\int_{-X/2}^{+X/2} \Phi \left\{ \rho^4 \frac{\partial^4 W}{\partial X^4} + 2\rho^2\mu^2 \frac{\partial^4 W}{\partial X^2 \partial Y^2} + \mu^4 \frac{\partial^4 W}{\partial Y^4} - 12(1-\nu^2)\mu^2 \left( \bar{\sigma}_x \rho^2 \frac{\partial^2 W}{\partial X^2} + \bar{\sigma}_y \mu^2 \frac{\partial^2 W}{\partial Y^2} + 2\bar{\tau}_{xy} \rho \mu \frac{\partial^2 W}{\partial X \partial Y} \right) \right\} dY = 0. \quad (13)$$

Now the most general system of middle-surface forces considered here is

$$\bar{\sigma}_x = \alpha_0 + \alpha_1 X,$$

$$\bar{\sigma}_y = \beta_0 + \beta_1 X,$$

$$\bar{\tau}_{xy} = \gamma Y,$$

where the coefficients  $\alpha_i$ ,  $\beta_i$  and  $\gamma$  are constants.

Substituting for  $W$  in terms of  $f$  and  $\Phi$  in equation (13) and integrating with respect to  $Y$ , the following differential equation is obtained for  $f$ .

$$p_4 X^4 f'''' + p_3 X^3 f'''' + (p_2 + q_2 X^2 + r_2 X^3) X^2 f'' + (p_1 + q_1 X^2 + r_1 X^3) X f' + (p_0 + q_0 X^2 + r_0 X^3) f = 0 \quad (2')$$

where the coefficients are defined by equations (3) and (4).

The arbitrary constants in the solution of equation (2') are found from the boundary conditions at the ends of the plate. When the ends are clamped these conditions are satisfied completely; when the ends are simply-supported however the condition of zero moment cannot be satisfied exactly, but is represented approximately by the expression

$$l_0 f'' - \frac{2}{X} l_1 f' = 0$$

which satisfies the requirement that the variation  $\delta f$  should do no work on the boundary.

## APPENDIX II

### *Plates with Simply-Supported Sides*

In this report the buckled form of plates simply-supported along the sides has been expressed in the form

$$W = f\Phi$$

where the function  $\Phi$  satisfies the boundary conditions

$$[\Phi]_{\theta=\pm 1/2} = [\Phi']_{\theta=\pm 1/2} = 0, \text{ where } \Phi' = \frac{d\Phi}{d\theta} \text{ etc.}$$

The bending-moment distribution  $M_{x'}$  about the sides of the plate which would strictly be necessary for the plate to assume this buckled form is given by

$$M_{x'} = \frac{1}{1+\nu} [M_x + M_y]_{\theta=\pm 1/2}. \quad (14)$$

Now the bending moments  $M_x$  and  $M_y$  are given by

$$M_x = -\frac{D}{a} \left( \rho^2 \frac{\partial^2 W}{\partial X^2} + \nu \mu^2 \frac{\partial^2 W}{\partial Y^2} \right), \quad M_y = -\frac{D}{a} \left( \mu^2 \frac{\partial^2 W}{\partial Y^2} + \nu \rho^2 \frac{\partial^2 W}{\partial X^2} \right) \quad (15)$$

where the derivatives of  $W$  can be expressed as

$$\frac{\partial^2 W}{\partial X^2} = \frac{1}{X^2} [\Phi X^2 f'' - 2\theta \Phi' X f' + \theta(\theta \Phi'' + 2\Phi') f], \quad \frac{\partial^2 W}{\partial Y^2} = \frac{1}{X^2} \Phi'' f. \quad (16)$$

Substituting equations (15) and (16) in equation (14), we obtain

$$M_{x'} = \frac{\rho^2 D \Phi'}{a X^2} (X f' - f). \quad (17)$$

Now the slope of the plate normal to the side  $\theta = \frac{1}{2}$  is given by

$$\begin{aligned} \left[ \frac{\partial w}{\partial y'} \right]_{\theta=1/2} &= \mu \frac{\partial W}{\partial Y} \cos \eta + \rho \frac{\partial W}{\partial X} \sin \eta \\ &= \left( \mu \cos \eta - \frac{\rho}{2} \sin \eta \right) \frac{f \Phi'}{X}. \end{aligned} \quad (18)$$

Hence from equations (17) and (18) the total work done on the side  $\theta = \frac{1}{2}$  by the moment  $M_{x'}$  is given by

$$\begin{aligned} T' &= \frac{\rho^2 D \Phi'^2}{2a} \left( \mu \cos \eta - \frac{\rho}{2} \sin \eta \right) \int_1^{1+\rho} \frac{f}{X^3} (X f' - f) dX \\ &= \frac{\rho^2 D \Phi'^2}{4a} \left( \mu \cos \eta - \frac{\rho}{2} \sin \eta \right) \left[ \frac{f^2}{X^2} \right]_1^{1+\rho}. \end{aligned}$$

Now the deflection at the ends of the plates considered in this report is zero, hence

$$T' = 0.$$

Similarly integrating  $M_{x'}$  along the side  $\theta = \frac{1}{2}$ , it can be shown that the moments along each side are self-equilibrating.

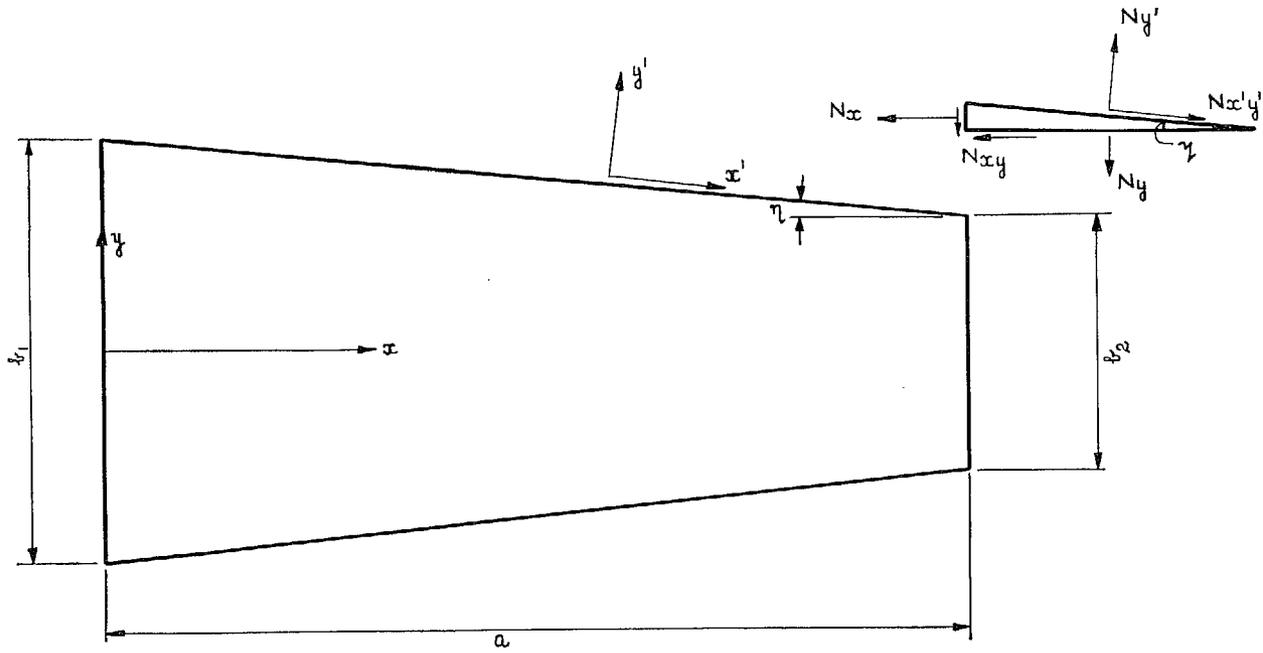


FIG. 1. Axes and notation.

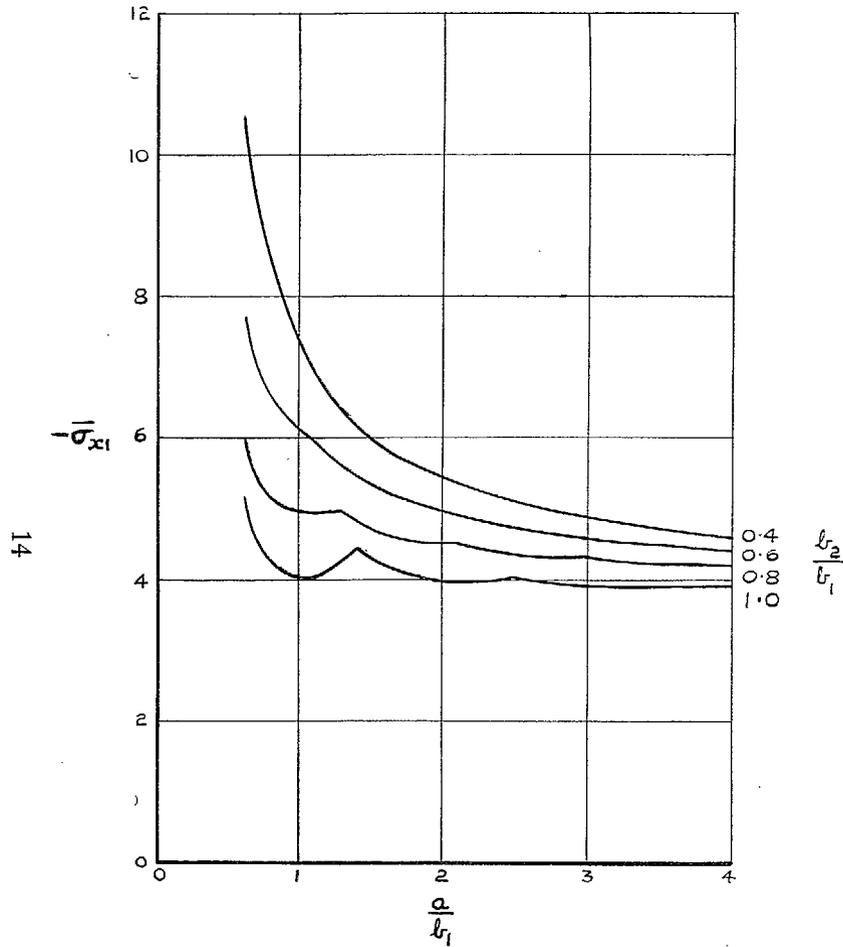


FIG. 2. Buckling-stress diagram. Sides and ends simply-supported. No stress normal to sides.

$$N_{x2}/N_{x1} = 0.8.$$

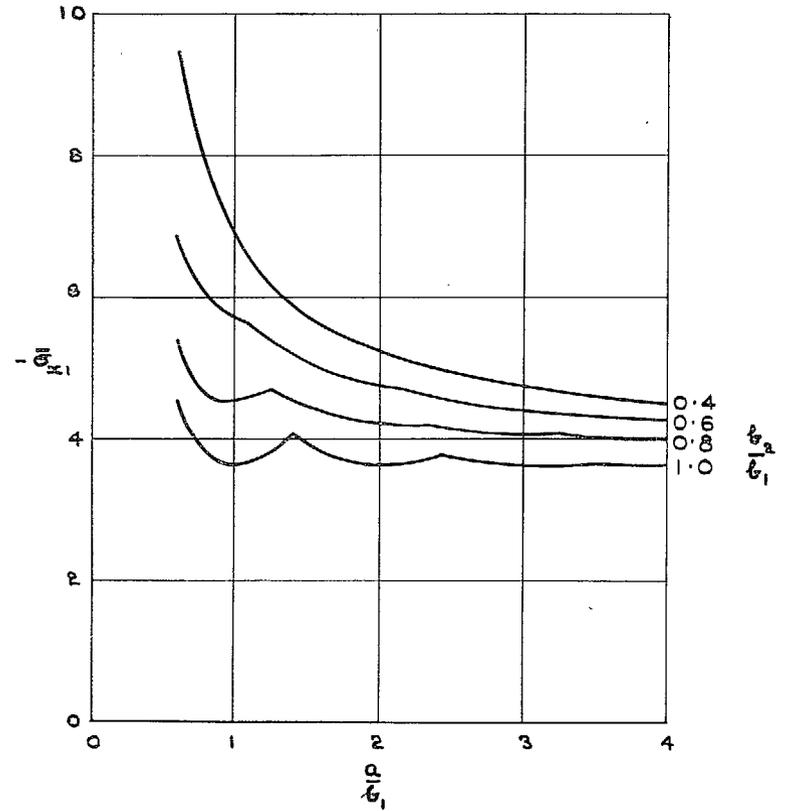


FIG. 3. Buckling-stress diagram. Sides and ends simply-supported. No stress normal to sides.

$$N_{x2}/N_{x1} = 1.$$

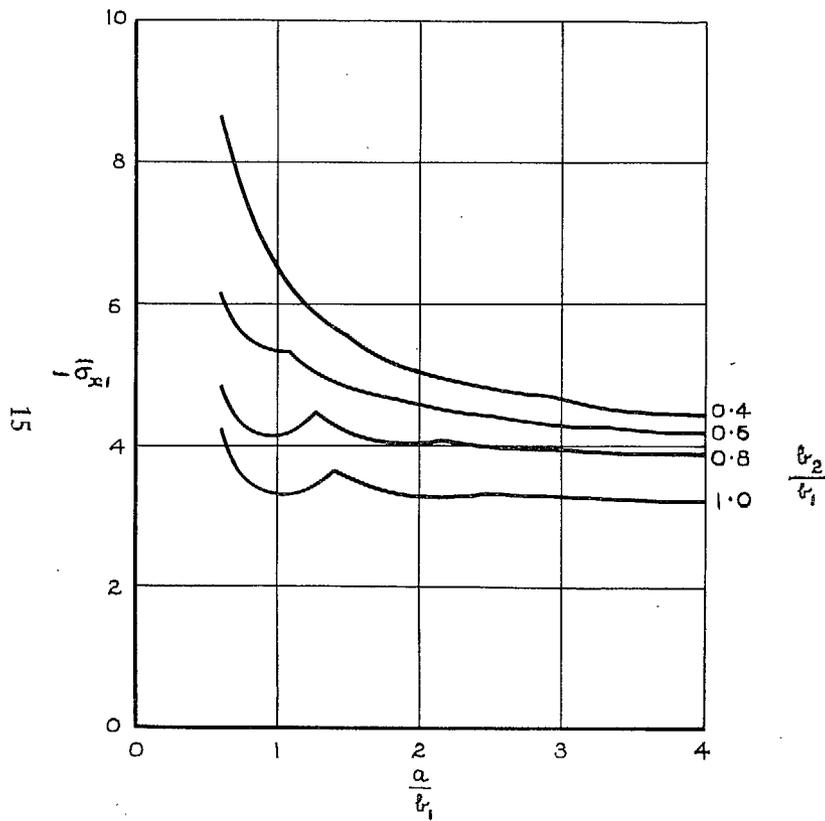


FIG. 4. Buckling-stress diagram. Sides and ends simply-supported. No stress normal to sides.

$$N_{x2}/N_{x1} = 1.2.$$

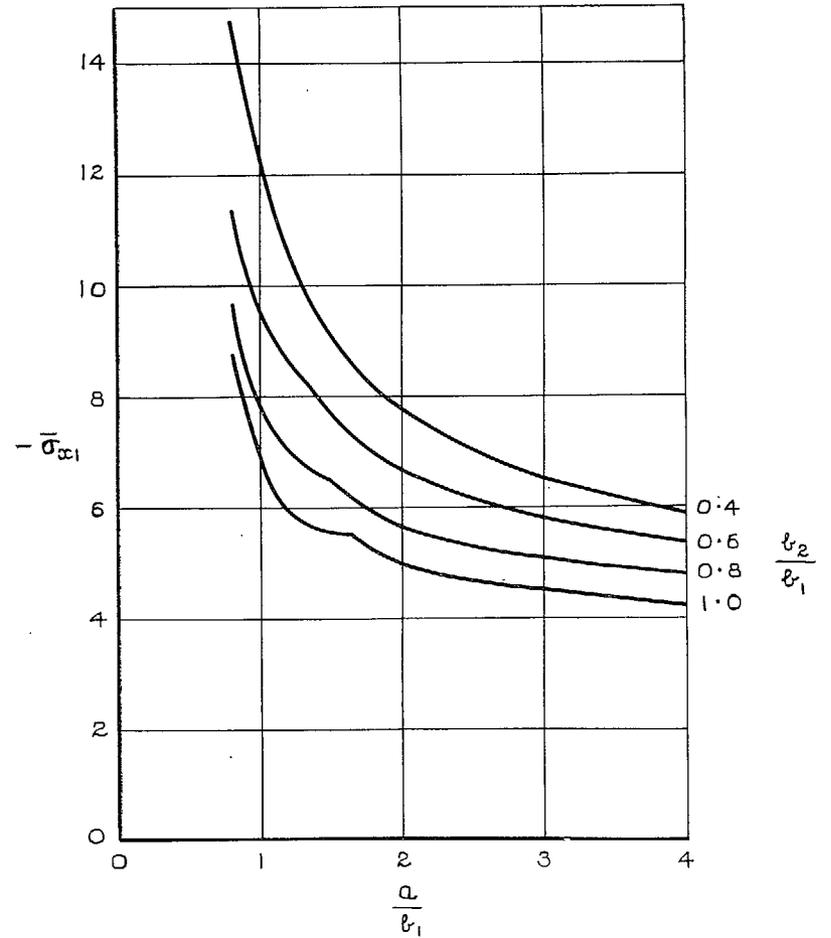


FIG. 5. Buckling-stress diagram. Sides simply-supported. Ends clamped. No stress normal to sides.

$$N_{x2}/N_{x1} = 0.8.$$

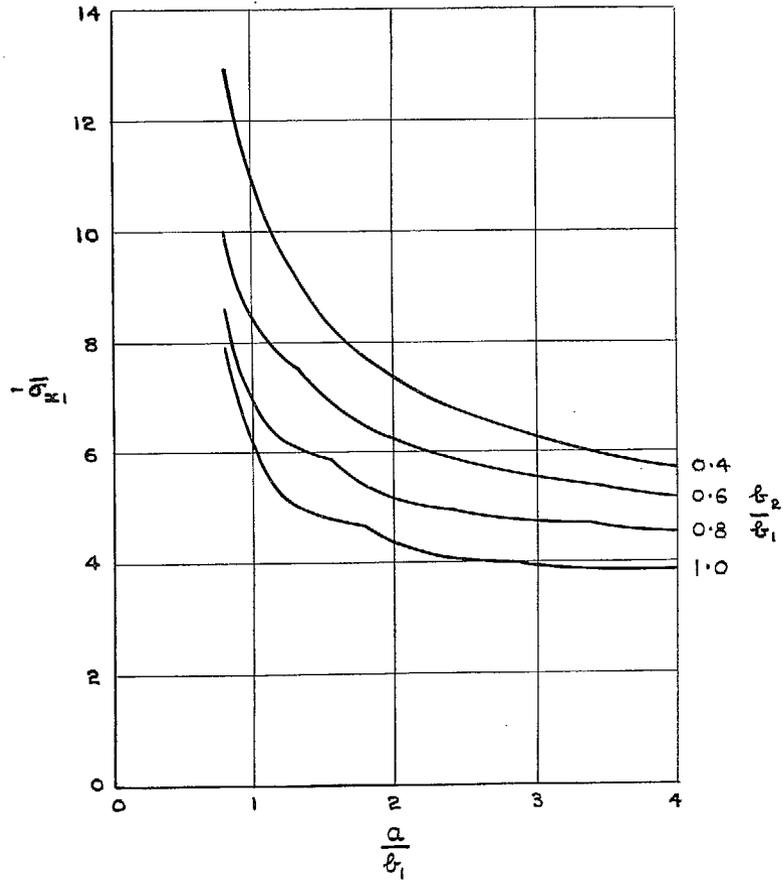


FIG. 6. Buckling-stress diagram. Sides simply-supported. Ends clamped. No stress normal to sides.

$$N_{x2}/N_{x1} = 1.0.$$

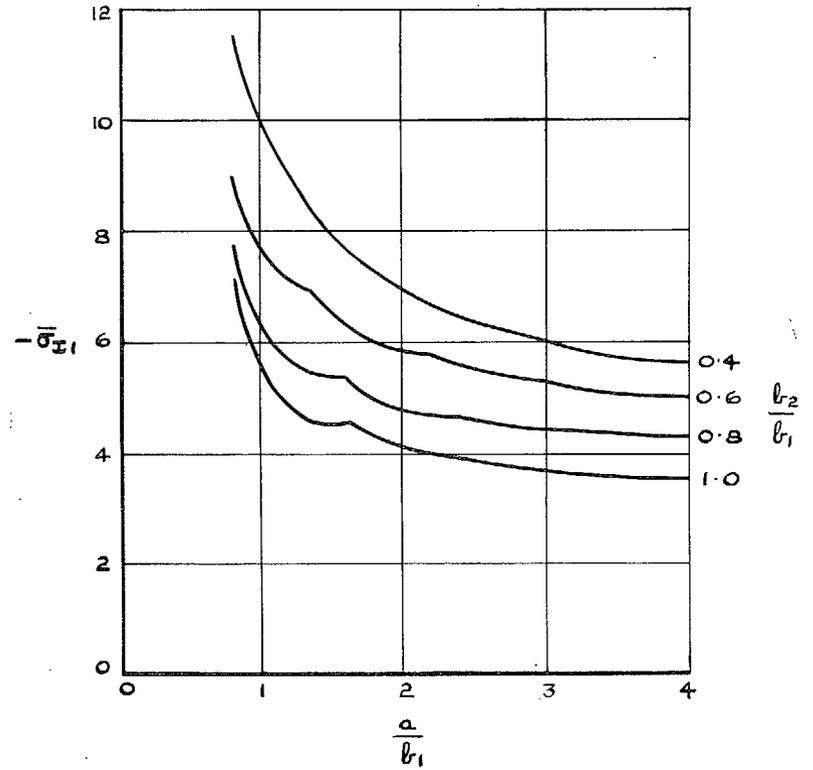


FIG. 7. Buckling-stress diagram. Sides simply-supported. Ends clamped. No stress normal to sides.

$$N_{x2}/N_{x1} = 1.2.$$

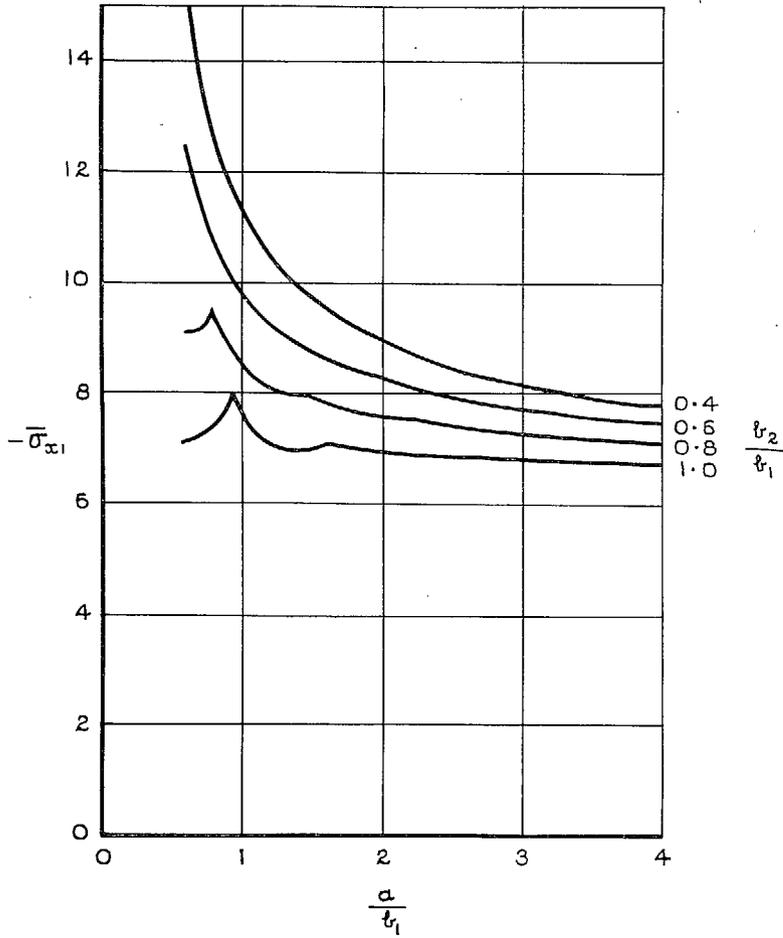


FIG. 8. Buckling-stress diagram. Sides clamped. Ends simply-supported. No stress normal to sides.

$$N_{x2}/N_{x1} = 0.8.$$

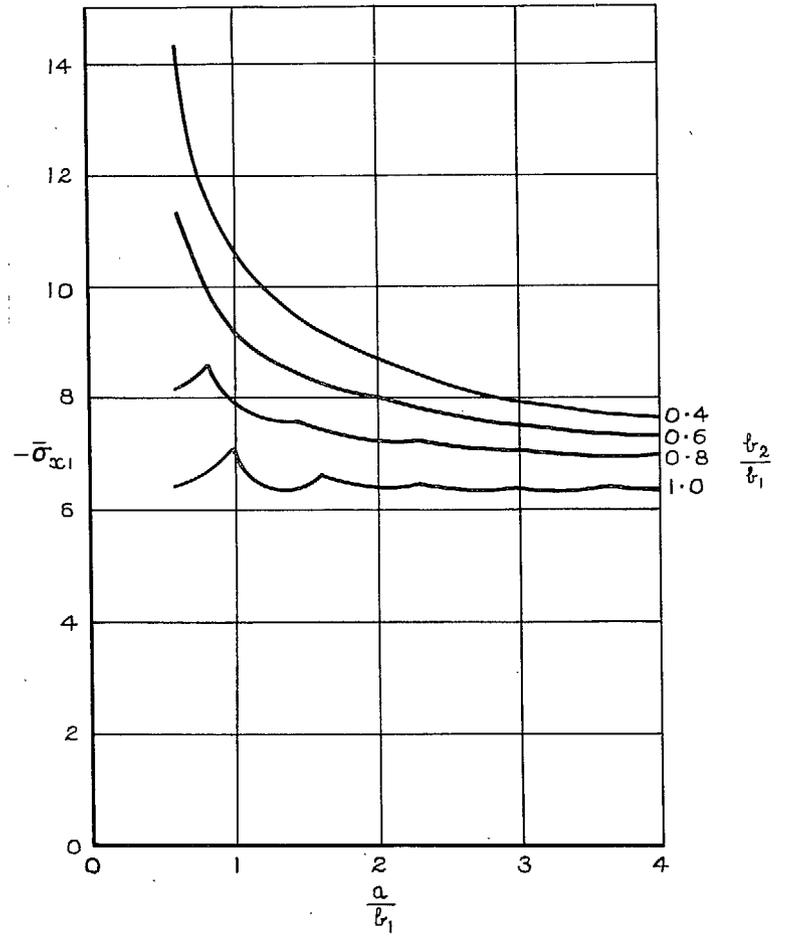


FIG. 9. Buckling-stress diagram. Sides clamped. Ends simply-supported. No stress normal to sides.

$$N_{x2}/N_{x1} = 1.0.$$

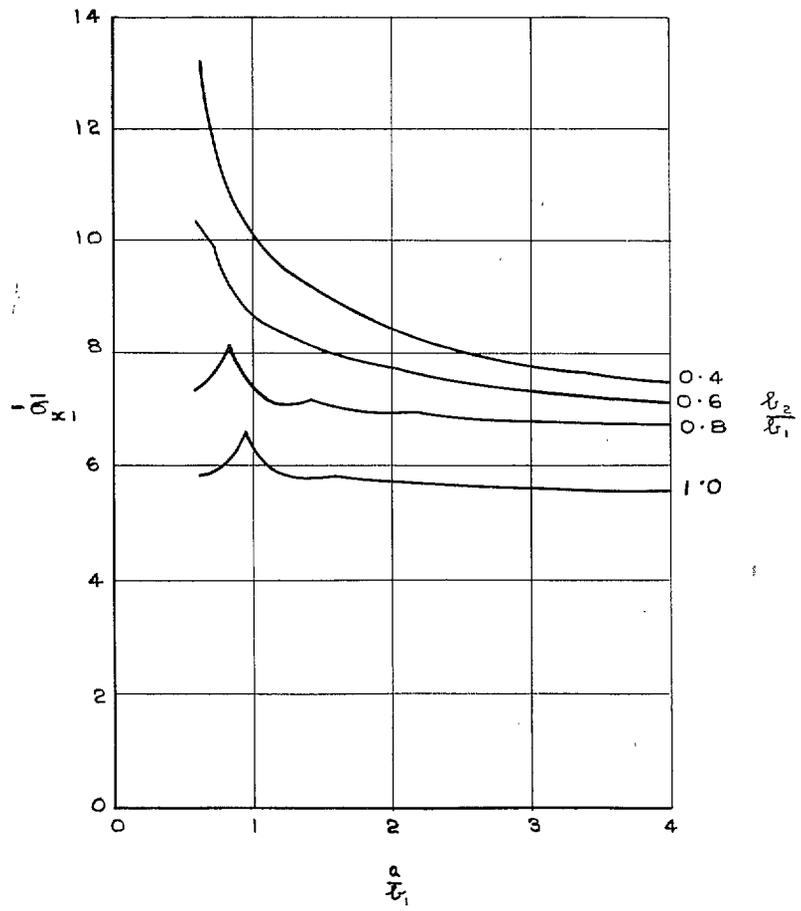


FIG. 10. Buckling-stress diagram. Sides clamped. Ends simply-supported. No stress normal to sides.

$$N_{x2}/N_{x1} = 1.2.$$

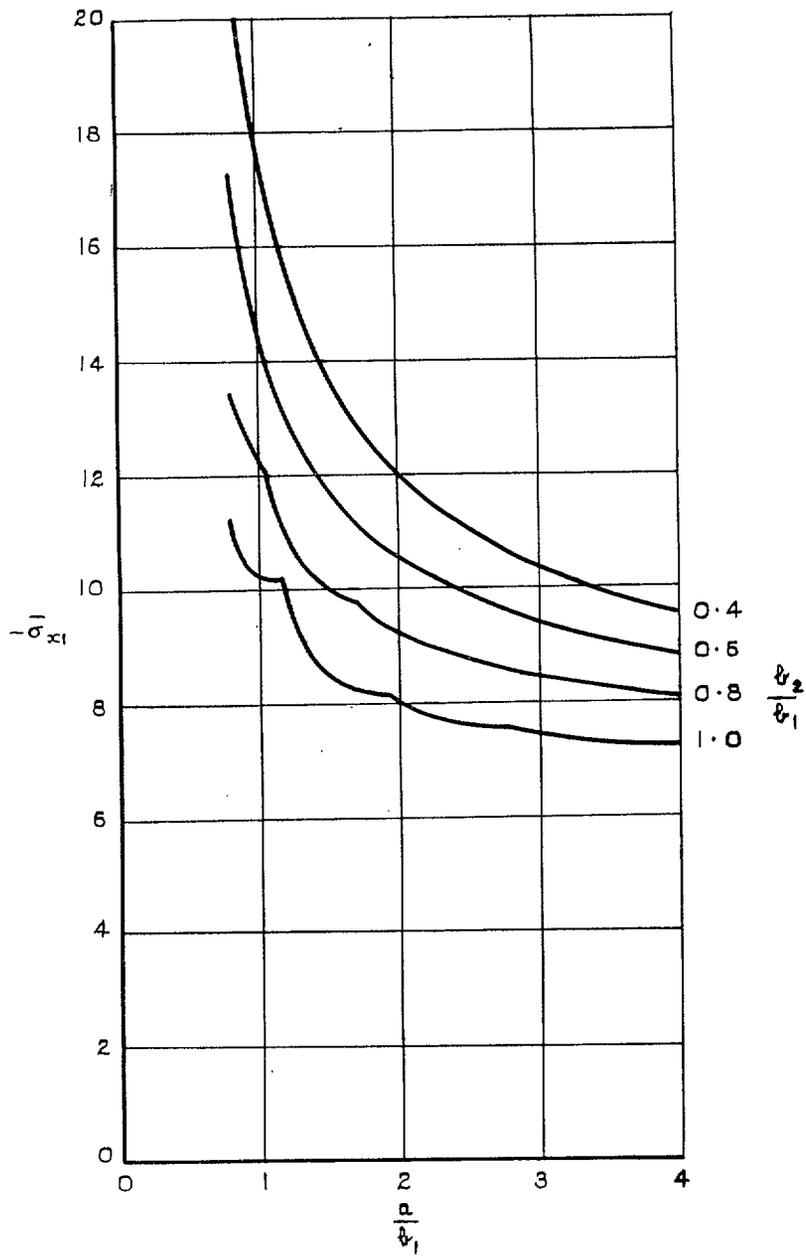


FIG. 11. Buckling-stress diagram. Sides and ends clamped. No stress normal to sides.

$$N_{x2}/N_{x1} = 0.8.$$

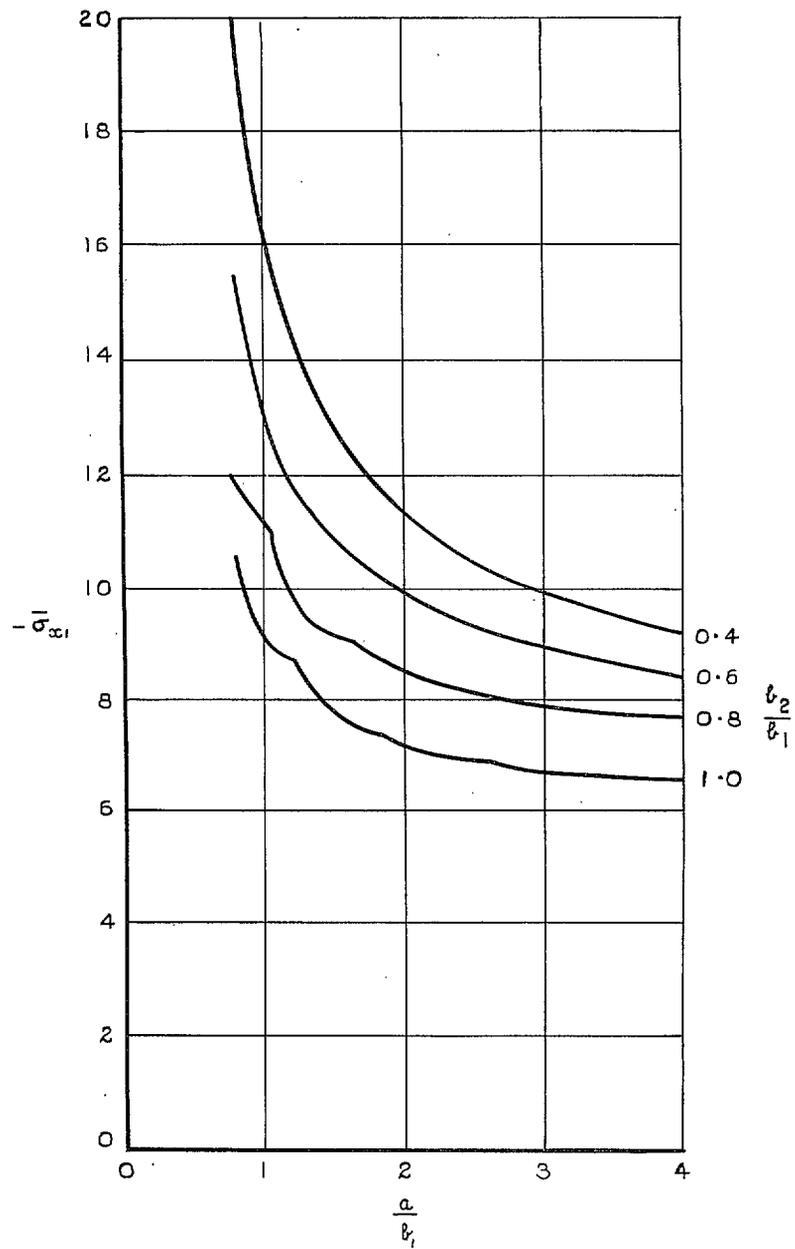


FIG. 12. Buckling-stress diagram. Sides and ends clamped. No stress normal to sides.

$$N_{x2}/N_{x1} = 1.0.$$

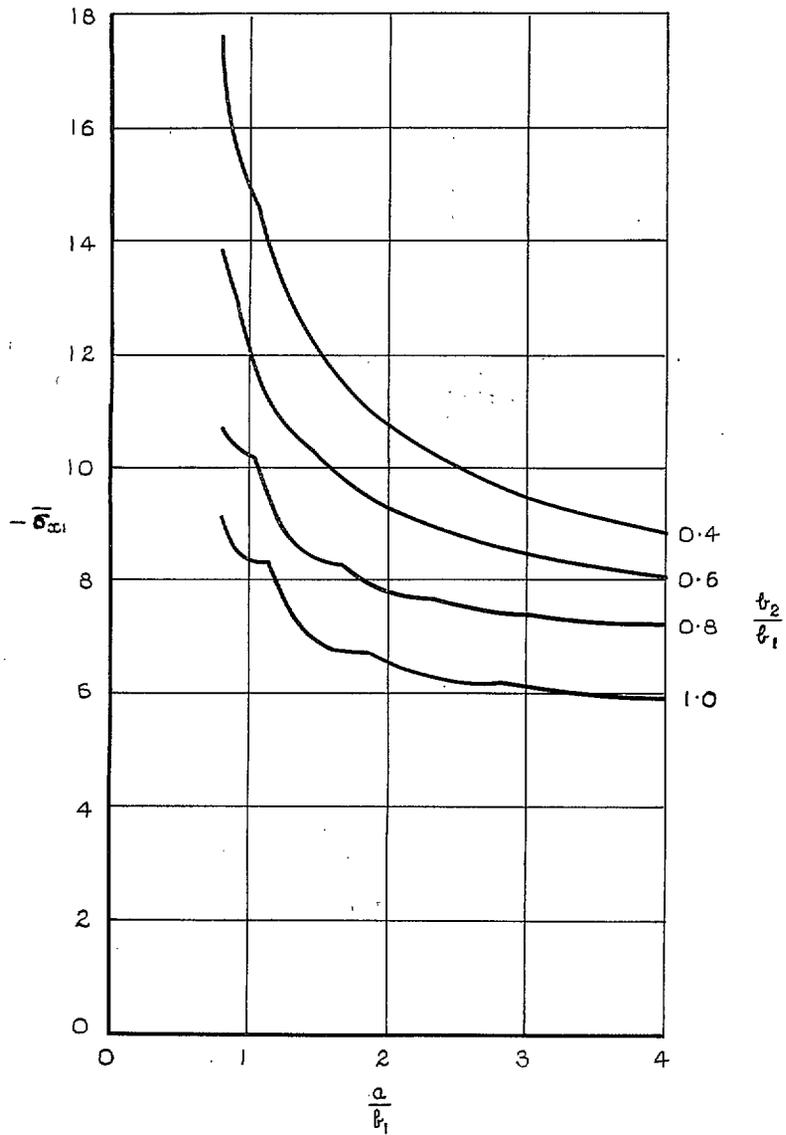


FIG. 13. Buckling-stress diagram. Sides and ends clamped. No stress normal to sides.

$$N_{x2}/N_{x1} = 1.2.$$

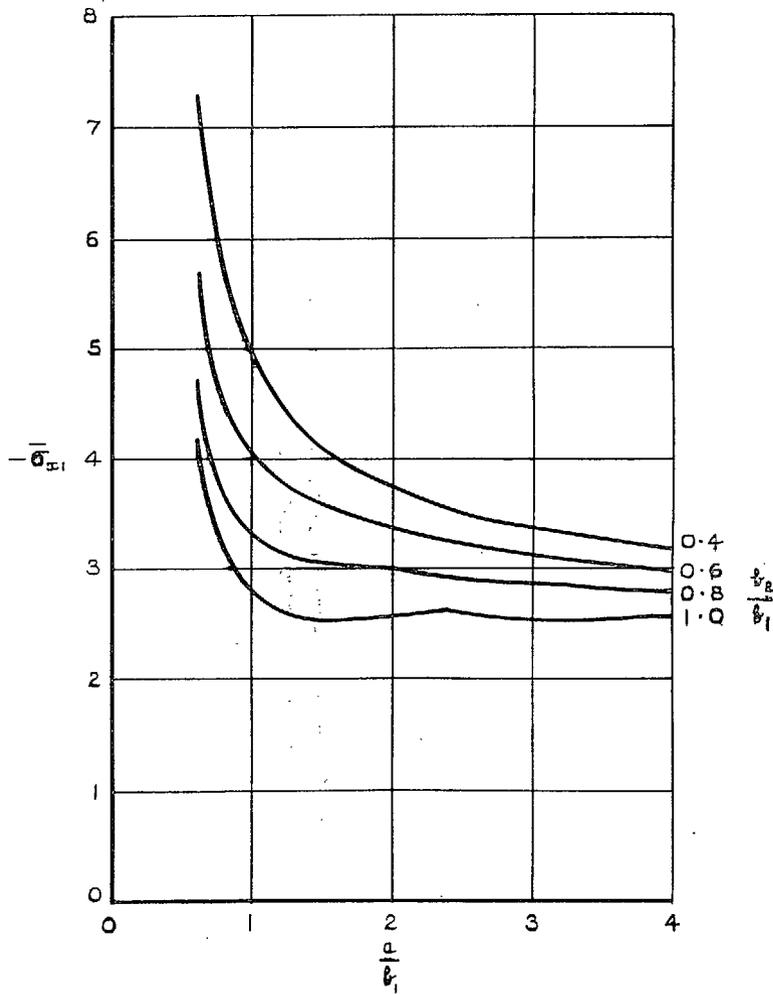


FIG. 14. Buckling-stress diagram. Sides and ends simply-supported. No strain normal to axis of taper.  $N_{x2}/N_{x1} = 1.0$ .

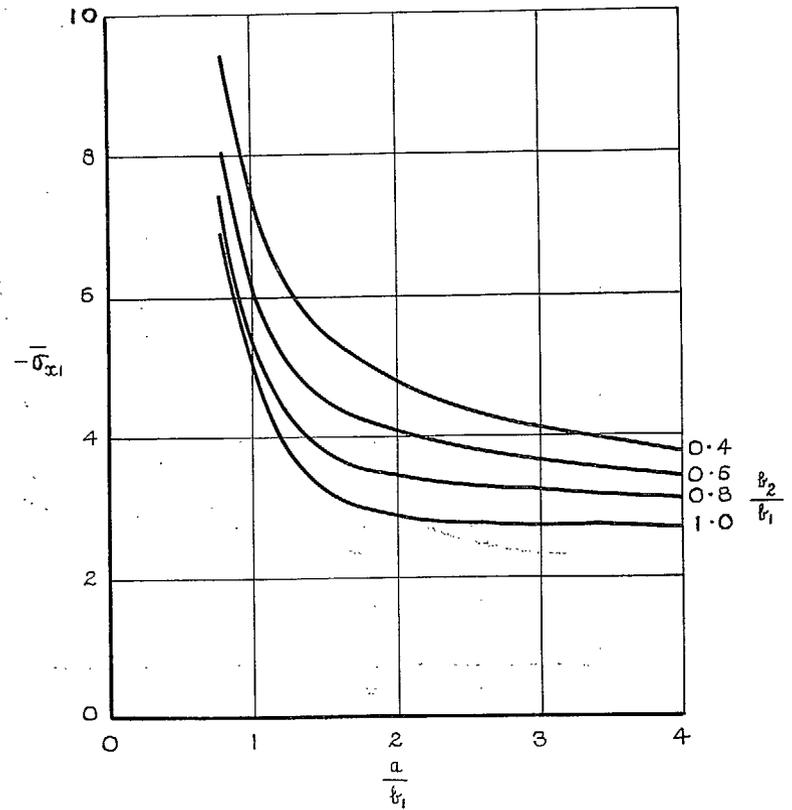


FIG. 15. Buckling-stress diagram. Sides simply-supported. Ends clamped. No strain normal to axis of taper.  $N_{x2}/N_{x1} = 1.0$ .

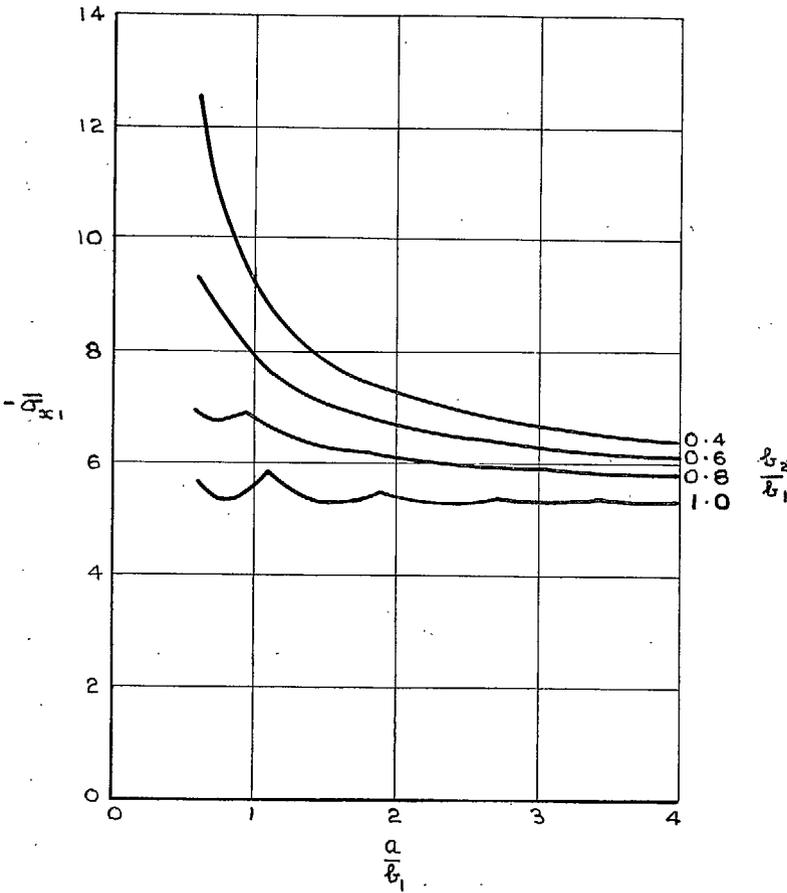


FIG. 16. Buckling-stress diagram. Sides clamped. Ends simply-supported. No strain normal to axis of taper.  $N_{x2}/N_{x1} = 1.0$ .




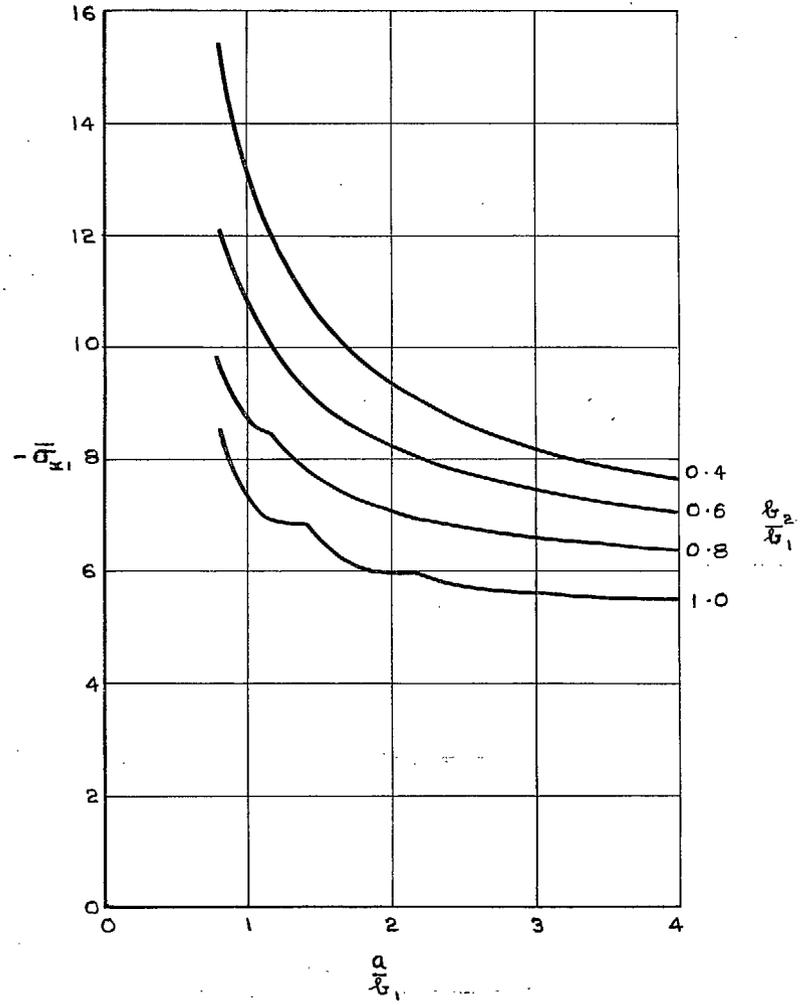


FIG. 17. Buckling-stress diagram. Sides and ends clamped. No strain normal to axis of taper:  $N_{x2}/N_{x1} = 1.0$ .

FREE NORMAL DISPLACEMENT OF SIDES

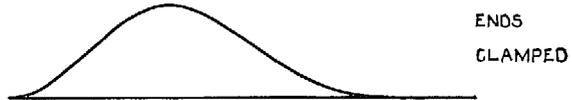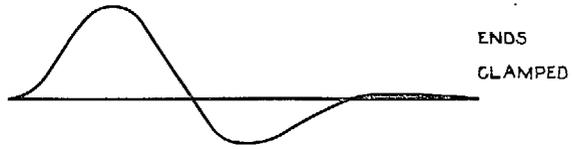

$$\frac{P}{E_1 I_1} = 2, \quad \frac{t}{E_1} = 0.4, \quad \frac{N_{x2}}{N_{x1}} = 1$$




NO DISPLACEMENT OF SIDES  
NORMAL TO AXIS OF TAPER

FIG. 18. Specimen buckled shapes, sides simply-supported.

FREE NORMAL DISPLACEMENT OF SIDES



$$\frac{P}{E_1 I_1} = 2, \quad \frac{t}{E_1} = 0.4, \quad \frac{N_{x2}}{N_{x1}} = 1$$



NO DISPLACEMENT OF SIDES  
NORMAL TO AXIS OF TAPER

FIG. 19. Specimen buckled shapes, sides clamped.

# Publications of the Aeronautical Research Council

## ANNUAL TECHNICAL REPORTS OF THE AERONAUTICAL RESEARCH COUNCIL (BOUND VOLUMES)

- 1942 Vol. I. Aero and Hydrodynamics, Aerofoils, Airscrews, Engines. 75s. (post 2s. 9d.)  
Vol. II. Noise, Parachutes, Stability and Control, Structures, Vibration, Wind Tunnels. 47s. 6d. (post 2s. 3d.)
- 1943 Vol. I. Aerodynamics, Aerofoils, Airscrews. 80s. (post 2s. 6d.)  
Vol. II. Engines, Flutter, Materials, Parachutes, Performance, Stability and Control, Structures. 90s. (post 2s. 9d.)
- 1944 Vol. I. Aero and Hydrodynamics, Aerofoils, Aircraft, Airscrews, Controls. 84s. (post 3s.)  
Vol. II. Flutter and Vibration, Materials, Miscellaneous, Navigation, Parachutes, Performance, Plates and Panels, Stability, Structures, Test Equipment, Wind Tunnels. 84s. (post 3s.)
- 1945 Vol. I. Aero and Hydrodynamics, Aerofoils. 130s. (post 3s. 6d.)  
Vol. II. Aircraft, Airscrews, Controls. 130s. (post 3s. 6d.)  
Vol. III. Flutter and Vibration, Instruments, Miscellaneous, Parachutes, Plates and Panels, Propulsion. 130s. (post 3s. 3d.)  
Vol. IV. Stability, Structures, Wind Tunnels, Wind Tunnel Technique. 130s. (post 3s. 3d.)
- 1946 Vol. I. Accidents, Aerodynamics, Aerofoils and Hydrofoils. 168s. (post 3s. 9d.)  
Vol. II. Airscrews, Cabin Cooling, Chemical Hazards, Controls, Flames, Flutter, Helicopters, Instruments and Instrumentation, Interference, Jets, Miscellaneous, Parachutes. 168s. (post 3s. 3d.)  
Vol. III. Performance, Propulsion, Seaplanes, Stability, Structures, Wind Tunnels. 168s. (post 3s. 6d.)
- 1947 Vol. I. Aerodynamics, Aerofoils, Aircraft. 168s. (post 3s. 9d.)  
Vol. II. Airscrews and Rotors, Controls, Flutter, Materials, Miscellaneous, Parachutes, Propulsion, Seaplanes, Stability, Structures, Take-off and Landing. 168s. (post 3s. 9d.)
- 1948 Vol. I. Aerodynamics, Aerofoils, Aircraft, Airscrews, Controls, Flutter and Vibration, Helicopters, Instruments, Propulsion, Seaplane, Stability, Structures, Wind Tunnels. 130s. (post 3s. 3d.)  
Vol. II. Aerodynamics, Aerofoils, Aircraft, Airscrews, Controls, Flutter and Vibration, Helicopters, Instruments, Propulsion, Seaplane, Stability, Structures, Wind Tunnels. 110s. (post 3s. 3d.)

### Special Volumes

- Vol. I. Aero and Hydrodynamics, Aerofoils, Controls, Flutter, Kites, Parachutes, Performance, Propulsion, Stability. 126s. (post 3s.)
- Vol. II. Aero and Hydrodynamics, Aerofoils, Airscrews, Controls, Flutter, Materials, Miscellaneous, Parachutes, Propulsion, Stability, Structures. 147s. (post 3s.)
- Vol. III. Aero and Hydrodynamics, Aerofoils, Airscrews, Controls, Flutter, Kites, Miscellaneous, Parachutes, Propulsion, Seaplanes, Stability, Structures, Test Equipment. 189s. (post 3s. 9d.)

### Reviews of the Aeronautical Research Council

1939-48 3s. (post 6d.)                      1949-54 5s. (post 5d.)

### Index to all Reports and Memoranda published in the Annual Technical Reports

1909-1947                                      R. & M. 2600 (out of print)

### Indexes to the Reports and Memoranda of the Aeronautical Research Council

Between Nos. 2351-2449	R. & M. No. 2450	2s. (post 3d.)
Between Nos. 2451-2549	R. & M. No. 2550	2s. 6d. (post 3d.)
Between Nos. 2551-2649	R. & M. No. 2650	2s. 6d. (post 3d.)
Between Nos. 2651-2749	R. & M. No. 2750	2s. 6d. (post 3d.)
Between Nos. 2751-2849	R. & M. No. 2850	2s. 6d. (post 3d.)
Between Nos. 2851-2949	R. & M. No. 2950	3s. (post 3d.)
Between Nos. 2951-3049	R. & M. No. 3050	3s. 6d. (post 3d.)
Between Nos. 3051-3149	R. & M. No. 3150	3s. 6d. (post 3d.)

HER MAJESTY'S STATIONERY OFFICE

*from the addresses overleaf*

© *Crown copyright* 1963

Printed and published by  
HER MAJESTY'S STATIONERY OFFICE

To be purchased from  
York House, Kingsway, London W.C.2  
423 Oxford Street, London W.1  
13A Castle Street, Edinburgh 2  
109 St. Mary Street, Cardiff  
39 King Street, Manchester 2  
50 Fairfax Street, Bristol 1  
35 Smallbrook, Ringway, Birmingham 5  
80 Chichester Street, Belfast 1  
or through any bookseller

*Printed in England*